



La lumière optimale

Driver CLAREO 45W 1100mA DIM DALI

Inrush Current : 50Amax

Line Regulation: $\pm 5\%$

Efficiency: $\geq 85\%$

Leakage Current: 0.5A@240Vac
/50Hz

Turn-on Delay Time: 3.0S max

Power Factor: $PF \geq 0.9$

Operating Temperature : -25°C - $+50^{\circ}\text{C}$

Over Voltage Protection: Built-in

Short Circuit Protection: Built-in

Storage Temperature: -40°C - $+70^{\circ}\text{C}$


Over Load Protection: Built-in

MTBF: 30,000 hour

Safety&EMC: IEC62386 EN55015



Désignation	REF
Driver CLAREO 45W 1100mA DIM DALI	DRI.5344

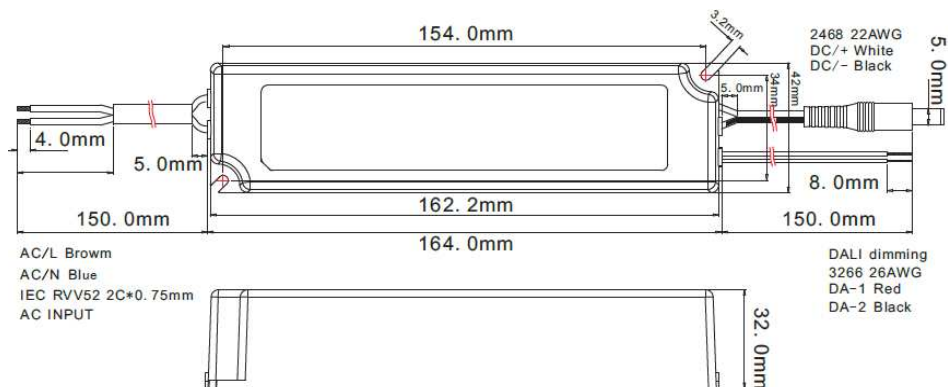

Photos non contractuelles - Les données peuvent faire l'objet de modifications